



Specification

Product	SMD(Micro) Fuse
Type	N0603T Series
Approved by	


1. Scope

- This specification covers the detail requirements for SMD Micro fuse type of N0603T Series

2. Classification

- Type designation shall be the following form


* For Example

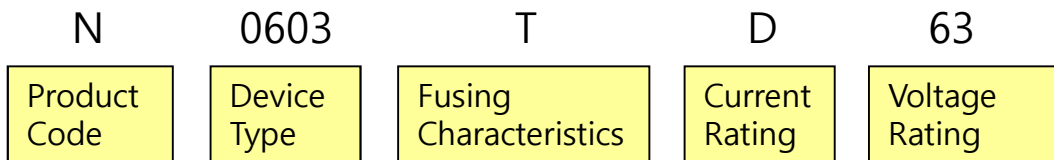

* T : Time Delay for DC, F : Fast Acting for DC
A : Time Delay for AC, C : Fast Acting for AC


3. Dimensions

- The fuse shall be designed and dimensions in accordance with this figure

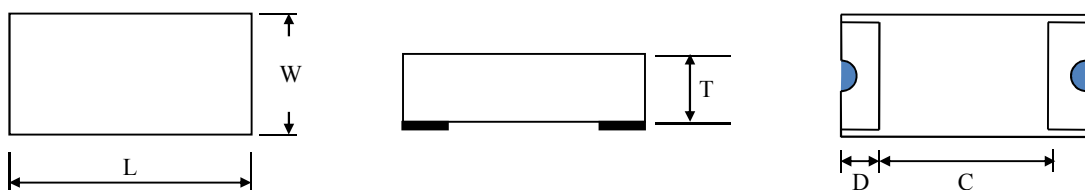

Device Type	Dimensions (mm) $\pm 0.1\text{mm}$				
	L	W	T	C	D
N0603T Series	1.6	0.8	0.6	1.0	0.3

4. Taping dimension

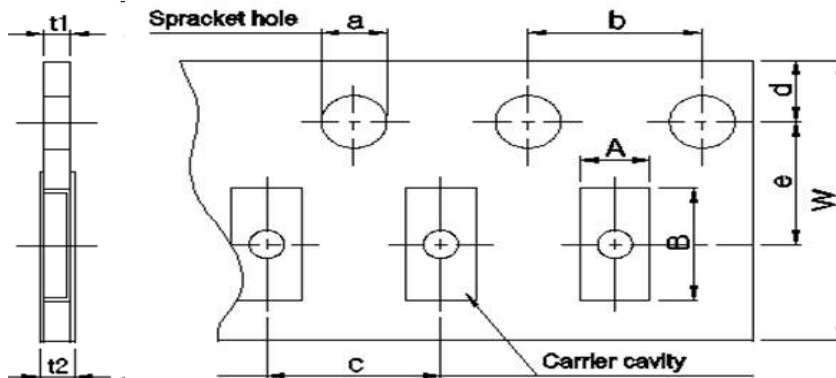

Type	A	B	a	b	c	d	e	t1	t2	W
N0603	1.0 ±0.1	1.8 ±0.1	1.5 \varnothing 0~+0.1	4.0 ±0.05	4.0 ±0.05	1.75 ±0.1	3.5 ±0.05	0.6 ±0.05	0.7 ±0.05	TP 8mm

* TP : Paper Tape

5. Ratings

- The rating shall be in accordance with table

Type	Marking	Rated Current	Fusing Time	Rated Voltage	Op.Temp Range	Interrupting Rating (A)	Q'ty / Reel
N0603 T Series	TD	0.75 A	Open within 1Sec. ~ 120 Sec. at 200% Rated Current. 30mSec~1.5 Sec Max. at 300% of Rated current	32VDC/63VDC	-40 °C ~ + 125 °C	35A	5000pcs
	TE	1.00 A		32VDC/63VDC		35A	
	TF	1.25 A		32VDC/63VDC		35A	
	TG	1.50 A		32VDC/63VDC		35A	
	TH	1.60 A		32VDC/63VDC		35A	
	TI	1.75 A		32VDC/63VDC		35A	
	TJ	2.00 A		32VDC/63VDC		35A	
	TK	2.50 A		32VDC/63VDC		35A	
	TL	3.00 A		32VDC/63VDC		35A	
	TM	3.15 A		32VDC/63VDC		35A	
	TN	3.50 A		32VDC/63VDC		35A	
	TO	4.00 A		32VDC/63VDC		35A	

- Typical value of fusing time for Time delay type is 3 - 10 Sec
Refer to attached Test report

6. Performance Characteristics

Unless otherwise specified, The standard range of condition for test is as follows :


Ambient Temperature : 10°C - 50°C
 Humidity : 45% - 85%

Performance Test Table(1-2)

No	Test Item	Test Condition	Requirement
1	Resistivity Test	<ul style="list-style-type: none"> Temp : Ambient Applied t for 1 hour and 15Min off at 110% of rated current 	Duration : 100 Hours (Endurance Test) Measure Voltage drop. Do not exceed 10%
2	Time/Current Characteristic	<ul style="list-style-type: none"> Apply 200% of rated current 	Fusing Time : Fast acting : 5sec Max Time Delay : 1 – 120 Sec
3	Temperature Rise	<ul style="list-style-type: none"> Measure the temperature at surface of device 	75°C Max
4	Cycling Test	<ul style="list-style-type: none"> Lower temperature : -40°C Upper temperature : +125°C 	No. of cycling Time : 5 No Open during Cycling
5	Surge Test	<ul style="list-style-type: none"> Apply 135% of rated current with programmable Load On/Off time 	No. of Cycling : 30,000
6	Terminal bond strength of the face plating	<ul style="list-style-type: none"> <u>JIS C 0051:1994 Sub-clause 7.4.1</u> (1) Bending value:3mm (Among the fulcrums:90mm) (2)Duration:10s ± 1s 	Change of internal resistance: ±3% No evidence of mechanical damage
7	Resistance to soldering Heat	<ul style="list-style-type: none"> (1) Test by a piece (2) Temp. of solder bath:260°C ± 5°C (3) Immersion time: 10s ± 1s (4) After immersion into solder, leaving the room temp. for 1h or more, and then measure the internal resistance 	No evidence of appearance damage Electrical characteristics shall be satisfied


No	Test Item	Test Condition	Requirement
7		<ul style="list-style-type: none"> Reflow soldering (1) Pre-heating: 150°C ± 5°C, 120s max (2) Peak: 240°C ± 5°C, 10s Max (3) After immersion into solder, leaving the room temp. for 1h or more, and then measure the internal resistance 	
8	Solderability	<ul style="list-style-type: none"> JIS C 0054:1994 (1) Test by a piece (2) Flux: Rosin-Methanol (3) Temp. of solder: bath: 235 °C ± 5°C (4) Immersion time: 2s ± 0.5s 	The surface of terminal immersed shall be min. of 95% covered with a New coating of solder
9	Endurance test	<ul style="list-style-type: none"> (1) Test condition: Nominal ambient Temp. and Relative humidity (2) Test potential: <ol style="list-style-type: none"> Cycle of 1h "ON" and 15min. "OFF" at 1.05 times rated current for 100 cycles After above the test, 1.25 times rated current for 1h 	The voltage drop across the fuse after the test shall not have increased by more than 10% of the value measured before test

7. Derating Curve

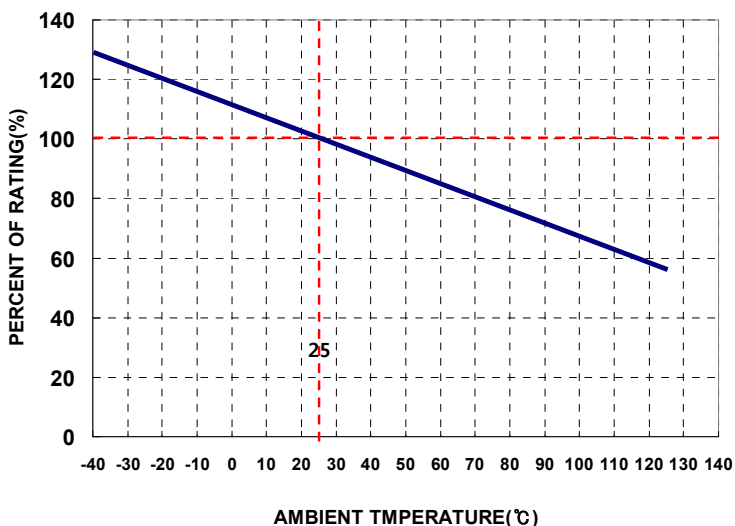


- For operation at ambient temperature in exceed 70°C, The Load shall be derated with Figure
- Normal derating should be 75% Max for all products

8. Time/Current Characteristics

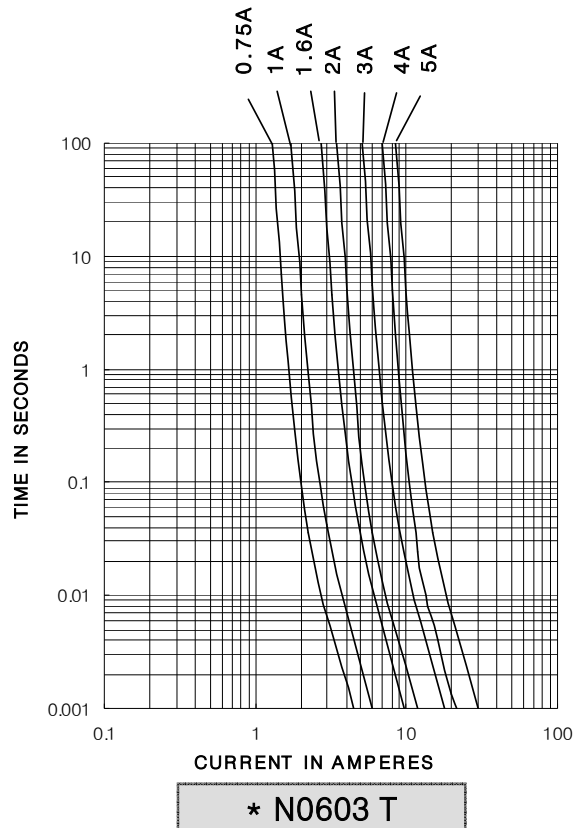

9. Reflow condition

Recommended soldering condition

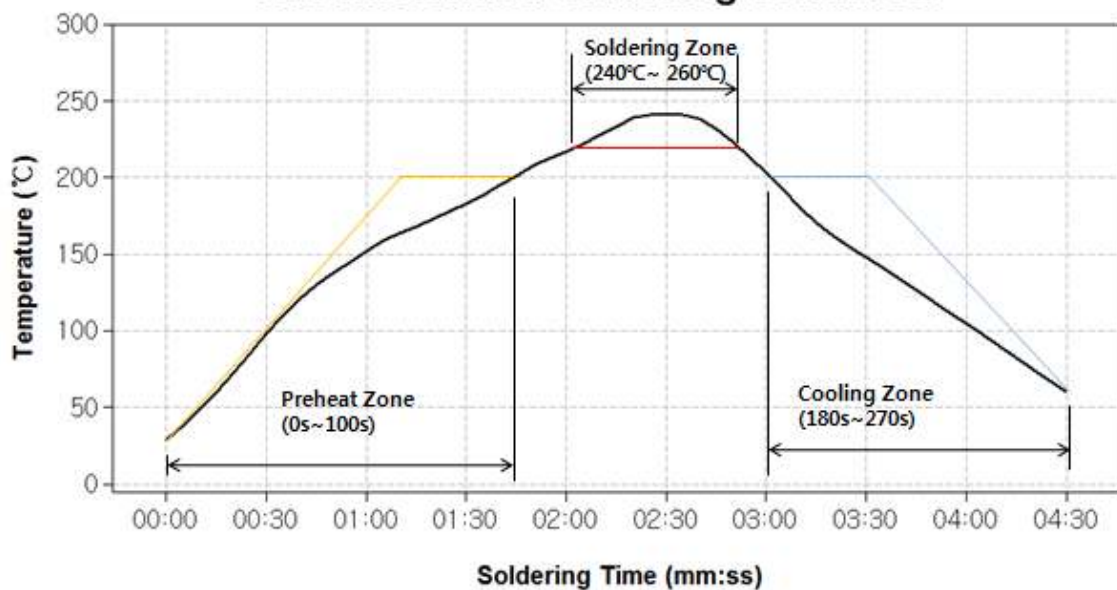

Recommended Re-flow Temp & Speed
Max 260 Degree 0.6m/Minute

● Certification (UL)



File E328408 Vol 1 Auth. Page 1 Issued: 2009-07-05
 Revised: 2012-08-13

FOLLOW-UP SERVICE PROCEDURE
 (TYPE R)

COMPONENT - FUSES, SUPPLEMENTAL
 (JDYX2, JDYX8)

Complementary Product Category

Manufacturer: SEE ADDENDUM FOR MANUFACTURER LOCATIONS


Applicant: 1817204 (Party Site)
 SM HI-TECH CO LTD
 (100517-358) 974-5 GOYEONRI UNGCHONMYON
 ULJUGUN ULSAN 689-871 KOREA

Recognized Company: 1817204 (Party Site)
 SAME AS APPLICANT
 (100517-358)

This Follow-Up Service Procedure authorizes the above Manufacturer(s) to use the marking specified by UL LLC, or any authorized licensee of UL LLC, including the UL Contracting Party, only on products when constructed, tested and found to be in compliance with the requirements of this Follow-Up Service Procedure and in accordance with the terms of the applicable service agreement with UL Contracting Party and any applicable Service Terms. The UL Contracting Party for Follow-Up Services is listed on addendum to this Follow-Up Service Procedure ("UL Contracting Party"). UL Contracting Party and UL LLC are referred to jointly herein as "UL."

UL further defines responsibilities, duties and requirements for both Manufacturers and UL representatives in the document titled, "UL Mark Surveillance Requirements" that can be located at the following web-site: <http://www.ul.com/fus> and in the document titled "UL and Subscriber Responsibilities" that can be located at the following website: <http://www.ul.com/responsibilities>. Manufacturers without Internet access may obtain the current version of these documents from their local UL customer service representative or UL field representative. For assistance, or to obtain a paper copy of these documents or the applicable Service Terms, please contact UL's Customer Service at <http://www.ul.com/global/eng/pages/corporate/contactus>, select a location and enter your request, or call the number listed for that location.

The Applicant, the specified Manufacturer(s) and any Recognized Company in this Follow-Up Service Procedure must agree to receive Follow-Up Services from UL Contracting Party. If your applicable agreement is a Global Services Agreement ("GSA") with an effective date of January 1, 2012 or later and this Follow-Up Service Procedure is issued on or after that effective date, the Applicant, the specified Manufacturer(s) and any Recognized Company will be bound to a Service Agreement for Follow-Up Services upon the earliest by any Subscriber of use of the prescribed UL Mark, acceptance of the factory inspection, or payment of the Follow-Up Service fees which will incorporate such GSA, this Follow-Up Service Procedure and the Follow-Up Service Terms which can be accessed by clicking here: <http://www.ul.com/contracts/Terms-After-12-31-2011>. In all other events, Follow-Up Services will be governed by and incorporate the terms of your applicable service agreement and this Follow-Up Service Procedure.



ONLINE CERTIFICATIONS DIRECTORY

Home [Quick Guide](#) [Contact Us](#) [UL.com](#)

JDYX2.E328408
Fuses, Supplemental - Component

[Page Bottom](#)

Fuses, Supplemental - Component

[See General Information for Fuses, Supplemental - Component](#)

SM HI-TECH CO LTD
 174-5 GOYEONRI UNGCHONMYON
 JLJUGUN, ULSAN 689-871 REPUBLIC OF KOREA

E328408

Cat. No.	Size	Amps	V ac/dc	Interrupting Rating (A)
N-1206 TC, N-1206 TD, N-1206 TE, N-1206 TF; N-1206 FC, N-1206 FD, N-1206 FE, N-1206 FF	1.6 x 3.2 x 0.8	0.5- 1.25	63 V dc	50
N-1206 TG, N-1206 TH, N-1206 TI, N-1206 TJ, N-1206 TK; N-1206 TL, N-1206 TM, N-1206 TO; N-1206 FG, N-1206 FH, N-1206 FI, N-1206 FJ, N-1206 FK; N-1206 FL, N-1206 FM, N-1206 FO	1.6 x 3.2 x 0.8	1.5-5	32 V dc	35
N-1206 CE, N-1206 CG, N-1206 CI, N-1206 CJ, N-1206 CK, N-1206 CL, N-1206 CM, N-1206 CN, N-1206 CO, N-1206 CP, N-1206 AE, N-1206 AG, N-1206 AI, N-1206 AJ, N-1206 AK, N-1206 AL, N-1206 AM, N-1206 AN, N-1206 AO	1.6 x 3.2 x 0.8	1 - 7	125/250Vac	35
N-0603 FD, N-0603 FE, N-0603 FF, N-0603 FG, N-0603 FH, N-0603 FI, N-0603 FJ, N-0603 FK, N-0603 FL, N-0603 FM, N-0603 FN, N-0603 FO, N-0603 FP, N-0603 FQ	1.6 x 0.8 x 0.5	0.75-5	32/63 Vdc	35
N-0603 TD, N-0603 TE, N-0603 TF, N-0603 TG, N-0603 TH, N-0603 TI, N-0603 TJ, N-0603 TK, N-0603 TL, N-0603 TM, N-0603 TN, N-0603 TO	1.6 x 0.8 x 0.5	0.75- 4.0	32/63 Vdc	35
N-6125 AE, N-6125 AI, N-6125 AK, N-6125 AM, N-6125 AO	6.1 x 2.5x 0.8	1 - 4	125/250 Vac	35
N-6125 CE, N-6125 CG, N-6125 CI, N-6125 CJ, N-6125 CK, N-6125 CL, N-6125 CM, N-6125 CN, N-6125 CO	6.1 x 2.5 x 0.8	1-5	125/250 Vac	35
N-6125 HCP, N-6125 HCQ, N-6125 HCR	6.1 x 2.5 x 0.8	6.3-10	65/125 Vdc125 Vac	35
N-6125 HCS	6.1 x 2.5 x 0.8	12	65/125 Vdc125 Vac	50
N-4524 CE, N-4524 CG, N-4524 CI, N-4524 CJ, N-4524 CK, N-4524 CL, N-4524 CM, N-4524 CN, N-4524 CO, N-4524 AE, N-4524 AG, N-4524 AI, N-4524 AJ, N-4524 AK, N-4524 AL, N-4524 AM, N-4524 AN, N-4524 AO	4.5 x 2.4 x 0.6	1 - 5	125/250 Vac	35

Marking: Company name or catalog designation. [Last Updated](#) on 2012-08-14

[Questions?](#)

[Print this page](#)

[Terms of Use](#)

[Page Top](#)

◆ 2012 UL LLC

When the UL Leaf Mark is on the product, or when the word "Environment" is included in the UL Mark, please search the [UL environment database](#) for additional information regarding this product's certification.

The appearance of a company's name or product in this database does not in itself assure that products so identified have been manufactured under UL's Follow-Up Service. Only those products bearing the UL Mark should be considered to be Listed and covered under UL's Follow-Up Service. Always look for the Mark on the product.

UL permits the reproduction of the material contained in the Online Certification Directory subject to the following conditions: 1. The Guide Information, Designs and/or Listings (files) must be presented in their entirety and in a non-misleading manner, without any manipulation of the data (or drawings). 2. The statement "Reprinted from the Online Certifications Directory with permission from UL" must appear adjacent to the extracted material. In addition, the reprinted material must include a copyright notice in the following format: "© 2012 UL LLC"

● Certification (RoHS)



Test Report No. F690101/LF-CT\$AYAU12-04707

Issued Date: 2012. 08. 23 Page 2 of 4

Sample No. : AYAU12-04707.001
 Sample Description : SMD Fuse
 Item No./Part No. : N1206 FE63
 Materials : N/A

Heavy Metals

Test Items	Unit	Test Method	MDL	Results
Cadmium (Cd)	mg/kg	With reference to IEC 62321:2008, ICP	1	N.D.
Lead (Pb)	mg/kg	With reference to IEC 62321:2008, ICP	5	N.D.
Mercury (Hg)	mg/kg	With reference to IEC 62321:2008, ICP	2	N.D.
Hexavalent Chromium (Cr VI)	mg/kg	With reference to IEC 62321:2008, UV-VIS	1	N.D.

Flame Retardants-PBBs/PBDEs

Test Items	Unit	Test Method	MDL	Results
Monobromobiphenyl	mg/kg	With reference to IEC 62321:2008, GC-MS	5	N.D.
Dibromobiphenyl	mg/kg	With reference to IEC 62321:2008, GC-MS	5	N.D.
Tribromobiphenyl	mg/kg	With reference to IEC 62321:2008, GC-MS	5	N.D.
Tetrabromobiphenyl	mg/kg	With reference to IEC 62321:2008, GC-MS	5	N.D.
Pentabromobiphenyl	mg/kg	With reference to IEC 62321:2008, GC-MS	5	N.D.
Hexabromobiphenyl	mg/kg	With reference to IEC 62321:2008, GC-MS	5	N.D.
Heptabromobiphenyl	mg/kg	With reference to IEC 62321:2008, GC-MS	5	N.D.
Octabromobiphenyl	mg/kg	With reference to IEC 62321:2008, GC-MS	5	N.D.
Nonabromobiphenyl	mg/kg	With reference to IEC 62321:2008, GC-MS	5	N.D.
Decabromobiphenyl	mg/kg	With reference to IEC 62321:2008, GC-MS	5	N.D.
Monobromodiphenyl ether	mg/kg	With reference to IEC 62321:2008, GC-MS	5	N.D.
Dibromodiphenyl ether	mg/kg	With reference to IEC 62321:2008, GC-MS	5	N.D.
Tribromodiphenyl ether	mg/kg	With reference to IEC 62321:2008, GC-MS	5	N.D.
Tetrabromodiphenyl ether	mg/kg	With reference to IEC 62321:2008, GC-MS	5	N.D.
Pentabromodiphenyl ether	mg/kg	With reference to IEC 62321:2008, GC-MS	5	N.D.
Hexabromodiphenyl ether	mg/kg	With reference to IEC 62321:2008, GC-MS	5	N.D.
Heptabromodiphenyl ether	mg/kg	With reference to IEC 62321:2008, GC-MS	5	N.D.
Octabromodiphenyl ether	mg/kg	With reference to IEC 62321:2008, GC-MS	5	N.D.
Nonabromodiphenyl ether	mg/kg	With reference to IEC 62321:2008, GC-MS	5	N.D.
Decabromodiphenyl ether	mg/kg	With reference to IEC 62321:2008, GC-MS	5	N.D.


NOTE: (1) N.D. = Not detected. (<MDL)
 (2) mg/kg = ppm
 (3) MDL = Method Detection Limit
 (4) - = No regulation
 (5) Negative = Undetectable / Positive = Detectable
 (6) * = Qualitative analysis (No Unit)
 (7) * = Boiling-water-extraction:
 Negative = Absence of CrVI coating
 Positive = Presence of CrVI coating; the detected concentration in boiling-water-extraction solution is equal or greater than 0.02 mg/kg with 50 cm² sample surface area.

This document is issued by the Company subject to its General Conditions of Service which are available on request or accessible at <http://www.sgs.com/ServiceConditions.aspx>, and, its electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/ServiceConditions.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction clauses set forth therein. Any copies of this document to which this information is not attached cannot be relied upon. The Company is not responsible for the accuracy or completeness of the information contained herein and shall not be liable for any errors or omissions, whether or not caused by negligence, in this document. The document represents confidential information and shall not be disclosed to any third party without the prior written consent of the Company. Any reproduction, alteration or modification of this document is prohibited and information may be processed in the field area of the test. Unless otherwise stated the results shown in this report refer only to the samples tested and such exceptions are reserved for all rights only.



Test Report No. F690101/LF-CTSAYAU12-04707

Issued Date: 2012. 08. 23 Page 3 of 4

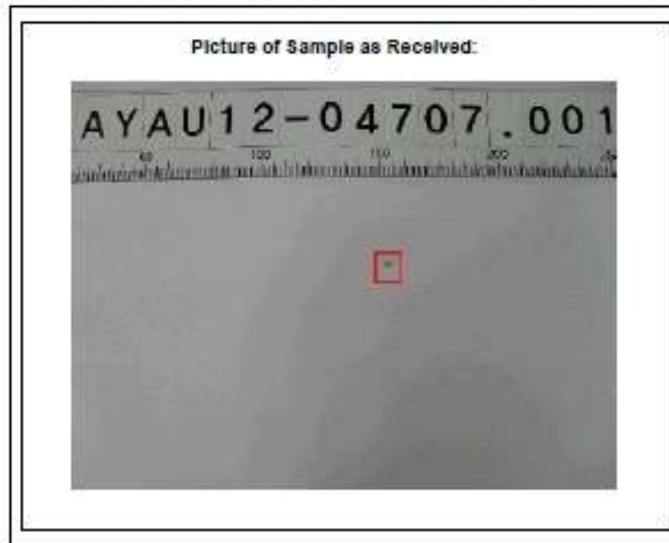

- NOTE: (1) N.D. = Not detected, (<MDL)
 (2) mg/kg = ppm
 (3) MDL = Method Detection Limit
 (4) - = No regulation
 (5) Negative = Undetectable / Positive = Detectable
 (6) ** = Qualitative analysis (No Unit)
 (7) * = Boiling-water-extraction:
 Negative = Absence of CrVI coating
 Positive = Presence of CrVI coating; the detected concentration in boiling-water-extraction solution is equal or greater than 0.02 mg/kg with 50 cm² sample surface area.


The information is based on the Company subject to its General Conditions of Service which are available on request at www.sgs.com/ServiceConditions and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/ServiceConditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any notice of this document is deemed to have been received by the addressee only upon receipt by the addressee's designated e-mail address. If there is a modification of the content or appearance of this document by automatic mail software, any reference may be made to the original paper of this copy. Unless otherwise stated, the results stated in this report relate only to the samples, tested and such samples, as received in 30 days only.



Test Report No. F690101/LF-CTSAYAU12-04707

Issued Date: 2012. 08. 23 Page 4 of 4

Testing Flow Chart for RoHS: Cd/Pb/Hg/Cr⁶⁺ /PBBs&PBDEs Testing

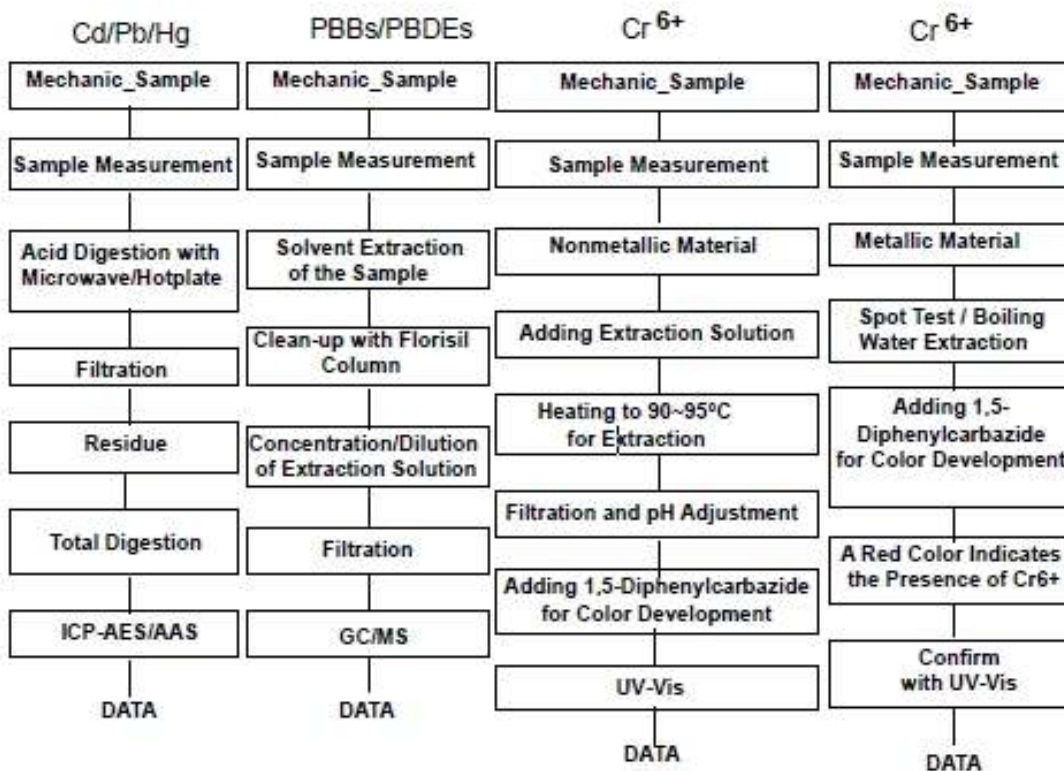

The samples were dissolved totally by pre-conditioning method according to above flow chart for Cd,Pb,Hg.
Section Chief : Shapless Park

*** End ***

- NOTE: (1) N.D. = Not detected.(<MDL)
 (2) mg/kg = ppm
 (3) MDL = Method Detection Limit
 (4) - = No regulation
 (5) Negative = Undetectable / Positive = Detectable
 (6) ** = Qualitative analysis (No Unit)
 (7) * = Boiling-water-extraction:
 Negative = Absence of CrVI coating
 Positive = Presence of CrVI coating; the detected concentration in boiling-water-extraction solution is equal or greater than 0.02 mg/kg with 50 cm² sample surface area.

This document is issued by the Company subject to its General Conditions of Service which are available on request or accessible at <http://www.sgs.com/ServiceConditions.aspx>, and its electronic format. Customers subject to Terms and Conditions for Electronic Generation of Reports. The Company will not be responsible for the Client and the document may not be used for any other purpose than that intended. Any reader of this document is advised that the information contained herein reflects the Company's findings at the time of its preparation only and within the limits of Client's instructions. Proper use and limitation of the content or interpretation of this document is entirely the client's responsibility and is not provided in this report. Clients should also read the results stated in this test report refer only to the samples tested and such analysis are related to 30 days only.

● Certification (Halogen Free-Br, Cl)



Test Report No. F690101/LF-CTSAYAU12-04935A

Issued Date: 2012. 09. 05 Page 1 of 3

To: **SM HI-TECH**
16 Goyeongongdan1-gil,
Uncheon-myun,
Uiju-gun,
Ulsan
Korea

The following merchandise was submitted and identified by the client as :

SGS File No.	: AYAU12-04935A
Product Name	: SMD Fuse
Item No./Part No.	: SMD Fuse
Received Date	: 2012. 09. 03
Test Period	: 2012. 09. 04 to 2012. 09. 05
Test Results	: For further details, please refer to following page(s)
Test Performed	: SGS Korea tested the sample(s) selected by applicant with following results.
Test Comments	: By the applicant's specific request, the sampling and testing was performed only for the part indicated in the photo without disassembly.

SGS Korea Co. Ltd. / Gimhae Laboratory

Thomas Hwang / Gimhae Lab. Mgr

Sharpless Park
Jonadan Lee
Taehee Kang
Jongsir Lim/Testing Person

This document is issued by the Company subject to its General Conditions of Service which are available on request or accessible at <http://www.sgs.com/sgsweb/sgsweb.nsf> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/sgsweb/sgsweb.nsf>. Attention is drawn to the limitation of liability, indemnification and jurisdiction clauses defined therein. Any holder of this document is advised that it remains the property of the Company and obligations under the information contained therein are not transferred to the holder of this document. If any holder of this document is not the client and this document is used for any other purpose, the user assumes full liability and obligation under the information contained therein. The document contains confidential and/or privileged information and its disclosure to third parties is prohibited. If you are not the intended recipient, please do not disseminate, distribute or copy this document. If you have received this document in error, please notify the sender immediately by e-mail. No liability is accepted for the content of the information contained in this document. The information contained in this document is confidential and its disclosure to third parties is prohibited. If you are not the intended recipient, please do not disseminate, distribute or copy this document. If you have received this document in error, please notify the sender immediately by e-mail. No liability is accepted for the content of the information contained in this document.




Test Report No. F690101/LF-CTSAYAU12-04935A

Issued Date: 2012. 09. 05 Page 2 of 3

Sample No. : AYAU12-04935A.001
 Sample Description : SMD Fuse
 Item No./Part No. : SMD Fuse
 Materials : FR4 PCB, Copper wire, Thermosetting resin

Halogen Contents

Test Items	Unit	Test Method	MDL	Results
Bromine(Br)	mg/kg	EN 14582:2007 , IC	30	N.D.
Chlorine(Cl)	mg/kg	EN 14582:2007 , IC	30	180

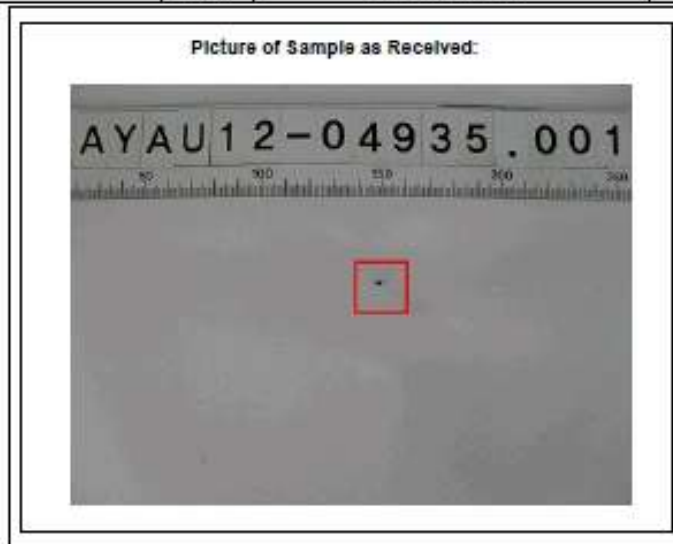

- NOTE: (1) N.D. = Not detected.(<MDL)
 (2) mg/kg = ppm
 (3) MDL = Method Detection Limit
 (4) - = No regulation
 (5) ** = Qualitative analysis (No Unit)
 (6) Negative = Undetectable / Positive = Detectable


This document is issued by the Company subject to its General Conditions of Service which are available on request or accessible at <http://www.sgs.com/sgsweb/sgsweb.nsf> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/sgsweb/sgsweb.nsf>. Attention is drawn to the liability, indemnification and limitation clauses set forth therein. Any holder of this document is advised that permission to publish or otherwise disseminate this document is granted by the Company only upon the written consent of the Company. The Company is not responsible for the data and/or the document content or accuracy neither is it responsible for copying, all rights and obligations under the respective documents. This document remains the property of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offences may be prosecuted to the fullest extent of the law. Please refer to the results sheet in the respective order only for the complete order and such sample(s) are retained for 30 days only.



Test Report No. F690101/LF-CTSAYAU12-04935A

Issued Date: 2012. 09. 05 Page 3 of 3

Flow Chart for Halogen Test

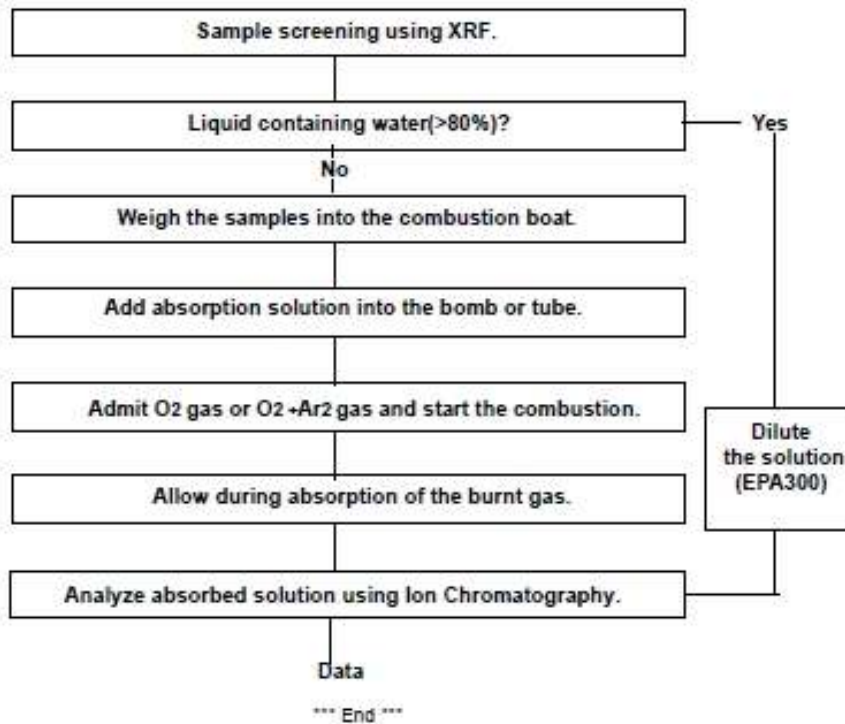

- NOTE: (1) N.D. = Not detected.(<MDL)
 (2) mg/kg = ppm
 (3) MDL = Method Detection Limit
 (4) - = No regulation
 (5) ** = Qualitative analysis (No Unit)
 (6) Negative = Undetectable / Positive = Detectable

This document is issued by the Company subject to its General Conditions of Service (which are available on request or accessible at <http://www.sgs.com>) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/sgsweb/sgsweb.nsf>. Attention is drawn to the limitation of liability, indemnification and jurisdiction clause set forth therein. Any reader of this document is advised that information contained herein reflects the Company's findings for the use of the information only and within the limits of Client's responsibility. If any reader of this document is in doubt as to the accuracy or reliability of the information contained herein, it is recommended that the reader contact the Company for further information. The document contains confidential information in full, unless otherwise specified by the Company. Any restricted distribution, copying or modification of the content or appearance of this document is prohibited and information may be prosecuted in the United States of America. Unless otherwise stated the results shown in this test report refer only to the samples tested and such samples are treated as 'AS IS' only.

● Certification (Halogen Free-F, I)



Test Report No. F690101/LF-CTSAYAU12-04935B

Issued Date: 2012. 09. 05 Page 1 of 3

To: **SM HI-TECH**
16 Goyeongongdan1-gil,
Uncheon-myun,
Ulsu-gun,
Ulsan
Korea

The following merchandise was submitted and identified by the client as :

SGS File No.	: AYAU12-04935B
Product Name	: SMD Fuse
Item No./Part No.	: SMD Fuse
Received Date	: 2012. 09. 03
Test Period	: 2012. 09. 04 to 2012. 09. 05
Test Results	: For further details, please refer to following page(s)
Test Performed	: SGS Korea tested the sample(s) selected by applicant with following results.
Test Comments	: By the applicant's specific request, the sampling and testing was performed only for the part indicated in the photo without disassembly.

SGS Korea Co. Ltd. / Gimhae Laboratory

Sharpless Park
Jonadan Lee
Taehee Kang
Jongsir Lim/Testing Person

Thomas Hwang / Gimhae Lab. Mgr

This document is issued by the Company subject to its General Conditions of Service which are available on request or accessible at <http://www.sgs.com/sgsweb/sgsweb.nsf> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/sgsweb/sgsweb.nsf>. Attention is drawn to the limitation of liability, indemnification and jurisdiction clauses defined therein. Any holder of this document is advised that it remains the property of the Company and that the Company is not responsible for the content of this document in any form and that the Company is not liable for any loss or damage arising from the use of this document. The document contains confidential and/or otherwise protected information. The document is intended for the use of the client only and is not to be distributed to other parties without the prior written consent of the Company. Any reproduction, alteration, forging or falsification of this document or its contents is prohibited and will be prosecuted to the fullest extent of the law. Online document search results shown in this test report refer only to the specified tests and such searches are relevant to SGS only.




Test Report No. F690101/LF-CTSAU12-04935B

Issued Date: 2012. 09. 05 Page 2 of 3

Sample No. : AYAU12-04935B.001
 Sample Description : SMD Fuse
 Item No./Part No. : SMD Fuse
 Materials : FR4 PCB, Copper wire, Thermosetting resin

Halogen Contents

Test Items	Unit	Test Method	MDL	Results
Fluorine(F)	mg/kg	EN 14582:2007 , IC	30	526
Iodine(I)	mg/kg	EN 14582:2007 , IC	50	198

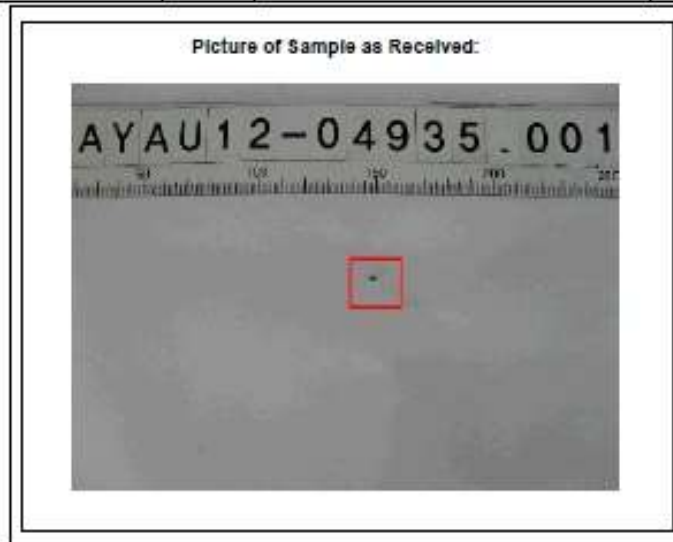

- NOTE: (1) N.D. = Not detected.(<MDL)
 (2) mg/kg = ppm
 (3) MDL = Method Detection Limit
 (4) - = No regulation
 (5) ** = Qualitative analysis (No Unit)
 (6) Negative = Undetectable / Positive = Detectable


This document is issued by the Company subject to its General Conditions of Service (which are available at <http://www.sgs.com/sgscoc/serviceconditions>), and its electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/sgscoc/electronicdocuments>, which is given in the English language. Information and/or data herein are for reference only and do not constitute a contract. The Company is not responsible for the data and the documents herein accuracy unless it is provided from existing all drawings and information under the reference documents. The document reflects the actual sample in all unless you inform against the Company. Any confidential information, figures or modification of the content or appearance of the document is invalid and reflects only the information in the latest issue of the document. Internal document used for results shown in this report refer only to the samples tested and such samples are retained for 90 days only.



Test Report No. F690101/LF-CT\$AYAU12-04935B

Issued Date: 2012. 09. 05 Page 3 of 3

Flow Chart for Halogen Test

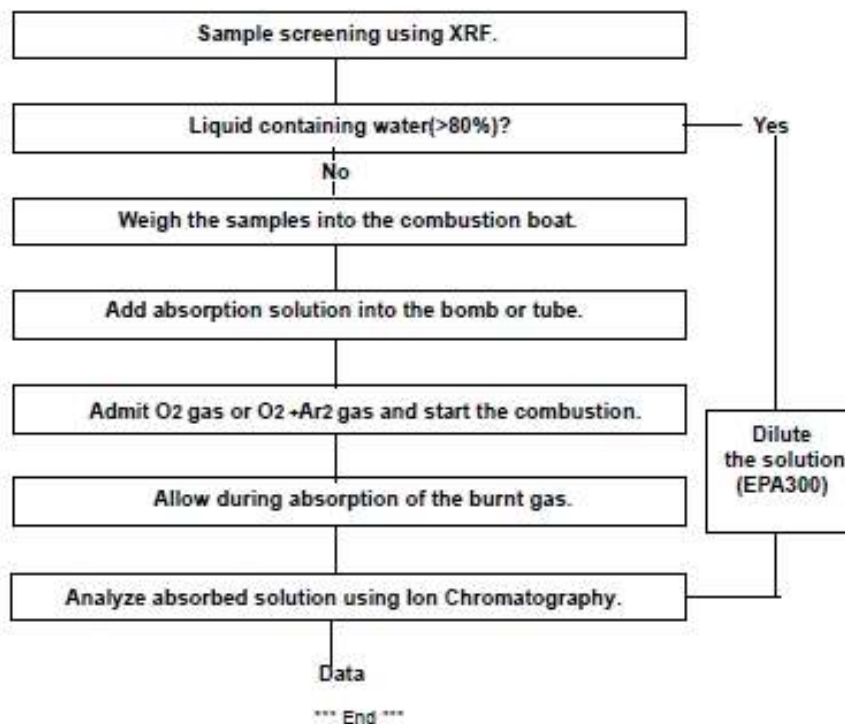

- NOTE: (1) N.D. = Not detected.(<MDL)
 (2) mg/kg = ppm
 (3) MDL = Method Detection Limit
 (4) - = No regulation
 (5) ** = Qualitative analysis (No Unit)
 (6) Negative = Undetectable / Positive = Detectable

The document is issued by the Company subject to its General Conditions of Service which are available on request or accessible at <http://www.sgs.com/sgsweb/sgsweb.nsf>, and its electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/sgsweb/sgsweb.nsf>. Reference is made to the disclaimer of liability, interpretation and jurisdiction issues set forth therein. The holder of the document is advised that information contained therein reflects the Company's belief and the accuracy of the information may vary slightly from the original data reported. It only. The Company's sole responsibility is to the Client and this document should not be used as a substitute for a copy of the original data and regulations under the respective requirements. The document remains confidential except in the limited circumstances specified in the Company's Confidentiality Policy. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the samples, tested and such conditions, and methods in use only.

● Certification (Antimony)



Test Report No. F690101/LF-CTSAYAU12-04924

Issued Date: 2012. 09. 05 Page 1 of 2

To: **SM HI-TECH**
16 Goyeongongdan1-gil,
Uncheon-myun,
Ulsan-gun,
Ulsan
Korea

The following merchandise was submitted and identified by the client as :

SGS File No.	: AYAU12-04924
Product Name	: SMD Fuse
Item No./Part No.	: N/A
Received Date	: 2012. 08. 31
Test Period	: 2012. 09. 03 to 2012. 09. 05
Test Results	: For further details, please refer to following page(s)
Test Performed	: SGS Korea tested the sample(s) selected by applicant with following results.
Test Comments	: By the applicant's specific request, the sampling and testing was performed only for the part indicated in the photo without disassembly.

SGS Korea Co. Ltd. / Gimhae Laboratory

Sharpless Park
Jonadan Lee
Taehee Kang
Jongsir Lim/Testing Person

Thomas Hwang / Gimhae Lab. Mgr

This document is issued by the Company subject to its General Conditions of Service which are available on request or accessible at <http://www.sgs.com/sgsweb/sgsweb.nsf> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/sgsweb/sgsweb.nsf>. Attention is drawn to the limitation of liability, indemnification and jurisdiction clauses defined therein. Any holder of this document is advised that it is subject to the jurisdiction of the courts of the Republic of Korea. The document contains confidential and/or proprietary information of the Company and its clients. It is the property of the Company and its clients and its disclosure, reproduction, copying, distribution, modification, deletion, or any other use without the prior written consent of the Company is strictly prohibited. In the event of a dispute, the Company shall be held liable for the consequences of its actions. The document contains confidential and/or proprietary information of the Company and its clients. It is the property of the Company and its clients and its disclosure, reproduction, copying, distribution, modification, deletion, or any other use without the prior written consent of the Company is strictly prohibited. In the event of a dispute, the Company shall be held liable for the consequences of its actions.




Test Report No. F690101/LF-CTSAYAU12-04924

Issued Date: 2012. 09. 05 Page 2 of 2

Sample No. : AYAU12-04924.001
 Sample Description : SMD Fuse
 Item No./Part No. : N/A
 Materials : PCB, INK, Wire

Heavy Metals

Test Items	Unit	Test Method	MDL	Results
Antimony (Sb)	mg/kg	With reference to EPA 3052(1996), US EPA 6010B(1996), ICP	10	N.D.

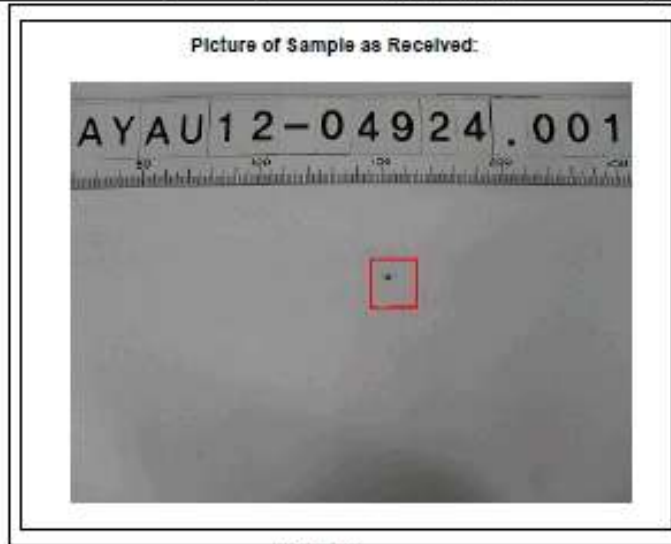

- NOTE: (1) N.D. = Not detected.(<MDL)
 (2) mg/kg = ppm
 (3) MDL = Method Detection Limit
 (4) - = No regulation
 (5) ** = Qualitative analysis (No Unit)
 (6) Negative = Undetectable / Positive = Detectable

The statement is issued by the Company subject to its General Conditions of Service printed material available on request at www.sgs.com and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/Document.asp. Reference is made to the disclaimer of liability, indemnification and jurisdiction clause without prejudice. Any holder of this document is advised that this document contains confidential information and its use is restricted to the purposes for which it was issued. The document contains confidential except for all relevant information appearing on the Company. Any unauthorized alteration, copying or distribution of the content or appearance of this document is prohibited and offenders may be prosecuted in the fullest extent of the law. Chinese characters indicate the results obtained in the test report with only in the simplified, traditional and full characters, and reference to the Company.

● Certification (REACH)



Test Report No. F690101/LF-CTSAYAU12-04761 Issued Date: August 30, 2012 Page 2 of 10

Test Method:

SGS In-House method - Analyzed by ICP-OES, PLM, UVWIS, LC/MS ,GC/MS and colorimetric method

Remarks:

1. The chemical analysis of specified SVHC is performed by means of currently available analytical techniques against the following SVHC related documents published by ECHA:
<http://echa.europa.eu/web/guest/candidate-list-table> (Candidate list)
These lists are under evaluation by ECHA and may subject to change in the future.
2. In accordance with Regulation (EC) No 1907/2006, any producer or importer of articles shall notify ECHA, in accordance with paragraph 2 of Article 7, if a substance meets the criteria in Article 57 and is identified in accordance with Article 59(1) of the Regulation, if (a) the substance is present in those articles in quantities totaling over one tonne per producer or importer per year; and (b) the substance is present in those articles above a concentration of 0.1% weight by weight (w/w).
3. Article 33 of Regulation (EC) No 1907/2006 requires supplier of an article containing a substance meeting the criteria in Article 57 and identified in accordance with Article 59(1) in a concentration above 0.1% weight by weight (w/w) shall provide the recipient of the article with sufficient information, available to the supplier, to allow safe use of the article including, as a minimum, the name of that substance in the Candidate List.
4. SGS adopts the interpretation of ECHA for SVHC in article unless indicated otherwise. Detail explanation is available at the following link:
- http://webstage.contribute.sgs.net/corpreach/documents/SGS-CTS_SVHC-paper-EN-11.pdf
5. Test results in this report are based on the tested sample. This report refers to testing result of composite material group by equal weight proportion. The material in each composite test group may come from one article.
6. If a SVHC is found over the reporting limit, client is suggested to identify the component which contains the SVHC and the exact concentration of the SVHC by requesting further quantitative analysis from the laboratory.

This document is issued by the Company subject to its General Conditions of Service printed, available in request or available at www.sgs.com and www.sgs.com/sgsweb for electronic format documents, subject to Terms and Conditions for Customers Documented at www.sgs.com/sgsweb. Client is drawn to the attention of liability, interpretation and procedure issues defined therein. If a notice of any document is without the necessary consent, neither affects the Company's liability in the time of its implementation nor constitutes the basis of a claim against it. The Company's only responsibility is to its Client and its documents may not constitute a warranty of any kind, either prior or subsequent, under the law of any jurisdiction. This document cannot be reproduced, stored in a retrieval system or transmitted in any form or by any means, electronic, mechanical, photocopying, recording, or by any information storage and retrieval system, without the prior written consent of the Company. The intellectual property rights of trademarks or registered names of the Company or other third parties may be protected by the laws of their respective countries.



Test Report No. F690101/LF-CTSAYAU12-04761

Issued Date: August 30, 2012

Page 3 of 10

Test Result(s)

Substance Name	CAS number	EC number	Concentration (%)	Reporting Limit (%)	Classification
Alkanes, C10-13, chloro (Short Chain Chlorinated Paraffins)	85535-84-8	287-476-5	N.D.	0.05	PBT
Anthracene	120-12-7	204-371-1	N.D.	0.05	PBT
Benzyl butyl phthalate (BBP)	85-68-7	201-622-7	N.D.	0.05	Toxic for Reproduction
Bis (2-ethylhexylphthalate) (DEHP)	117-81-7	204-211-0	N.D.	0.05	Toxic for Reproduction
Bis(tri-butyltin)oxide	56-35-9	200-268-0	N.D.	0.05	PBT
Cobalt dichloride*	7646-79-9	231-589-4	N.D.	0.005	Carcinogen Toxic for Reproduction
4,4-Diaminodiphenylmethane	101-77-9	202-974-4	N.D.	0.05	Carcinogen
Diarsenic pentaoxide*	1303-28-2	215-116-9	N.D.	0.005	Carcinogen
Diarsenic trioxide*	1327-53-3	215-481-4	N.D.	0.005	Carcinogen
Dibutyl phthalate (DBP)	84-74-2	201-557-4	N.D.	0.05	Toxic for Reproduction
Hexabromocyclododecane (HBCDD) and all major diastereoisomers identified (α-HBCDD, β-HBCDD, γ-HBCDD)	25637-99-4and 3194-55-6 (134237-51-7, 134237-50-6, 134237-52-8)	247-148-4 and 221-695-9	N.D.	0.05	PBT
Lead hydrogen arsenate*	7784-40-9	232-064-2	N.D.	0.005	Carcinogen Toxic for Reproduction
Sodium dichromate* (Sodium dichromate, dehydrate)	10588-01-9 (7789-12-0)	234-190-3	N.D.	0.005	Carcinogen Mutagen Toxic for Reproduction
5-tert-butyl-2,4,6-trinitro-m-xylene (musk xylene)	81-15-2	201-329-4	N.D.	0.05	vPvB
Triethyl arsenate*	15606-95-8	427-700-2	N.D.	0.005	Carcinogen

The document is issued by the Company subject to its General Conditions of Service printed separately available on request or accessible at <http://www.sgs.com> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/electronic_documents. Reference is made to the limitation of liability, indemnification and limitation of recourse clauses contained therein. If any of the documents is altered the information contained therein reflects the Company's policy at the time of its issuance and is not intended to be a contract. The Company's sole responsibility is to its Client and the information set out herein relates to a particular item or quantity of that item, and is subject to the conditions stated in the invoice and the test order. This document is valid for operational control in EU, without prior written approval of the Company. Any modification to the terms of the document is subject to the Company's written approval. The document is valid for operational control in EU, without prior written approval of the Company. Any modification to the terms of the document is subject to the Company's written approval. The document is valid for operational control in EU, without prior written approval of the Company.



Test Report No. F690101/LF-CTSAYAU12-04761 Issued Date: August 30, 2012 Page 4 of 10

Substance Name	CAS number	EC number	Concentration (%)	Reporting Limit (%)	Classification
Di-isobutyl phthalate(DIBP)	84-69-5	201-553-2	N.D.	0.05	Toxic for Reproduction
2,4-Dinitrotoluene	121-14-2	204-450-0	N.D.	0.05	Carcinogen
Tris(2-chloroethyl) phosphate	115-96-8	204-118-5	N.D.	0.05	Toxic for Reproduction
Anthracene oil	90640-80-5	292-602-7	N.D.	0.05	PBT; vPvB Carcinogen
Anthracene oil, anthracene paste; distn. Lights	91995-17-4	295-278-5	N.D.	0.05	PBT; vPvB Carcinogen Mutagen
Anthracene oil, anthracene paste, anthracene fraction	91995-15-2	295-275-9	N.D.	0.05	PBT; vPvB Carcinogen Mutagen
Anthracene oil, anthracene-low	90640-82-7	292-604-8	N.D.	0.05	PBT; vPvB Carcinogen Mutagen
Anthracene oil, anthracene paste	90640-81-6	292-603-2	N.D.	0.05	PBT; vPvB Carcinogen Mutagen
Coal tar pitch, high temperature	65996-93-2	266-028-2	N.D.	0.05	PBT; vPvB Carcinogen
Lead sulfochromate yellow (C.I. Pigment Yellow 34)*	1344-37-2	215-693-7	N.D.	0.005	Carcinogen Toxic for Reproduction
Lead chromate molybdate sulfate red (C.I. Pigment Red 104)*	12656-85-8	235-759-9	N.D.	0.005	Carcinogen Toxic for Reproduction
Lead chromate*	7758-97-6	231-846-0	N.D.	0.005	Carcinogen Toxic for Reproduction
Acrylamide	79-06-01	201-173-7	N.D.	0.05	Carcinogen Mutagen

This document is issued by the Company subject to its General Conditions of Service which are available on request to customers at www.sgs.com/ServiceConditions.aspx, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/ServiceConditions.aspx. Client's consent to the transfer of liability, indemnification and limitation of recourse shall be deemed to be implied by the signature of the document or by the signature of the Company's employee or by the signature of the Client's representative. The Client's signature and the signature of the Company's employee or the signature of the Client's representative shall be deemed to be the signature of the Client. The Client's signature and the signature of the Company's employee or the signature of the Client's representative shall be deemed to be the signature of the Client. The Client's signature and the signature of the Company's employee or the signature of the Client's representative shall be deemed to be the signature of the Client. The Client's signature and the signature of the Company's employee or the signature of the Client's representative shall be deemed to be the signature of the Client.



Test Report No. F690101/LF-CTSAYAU12-04761

Issued Date: August 30, 2012 Page 5 of 10

Substance Name	CAS number	EC number	Concentration (%)	Reporting Limit (%)	Classification
Boric acid*	10043-35-3 11113-50-1	233-139-2 234-343-4	N.A.	0.005	Toxic for Reproduction
Disodium tetraborate, anhydrous*	1330-43-4 12179-04-3 1303-96-4	215-540-4	N.A.	0.005	Toxic for Reproduction
Tetraboron disodium heptaoxide, hydrate*	12267-73-1	235-541-3	N.A.	0.005	Toxic for Reproduction
Trichloroethylene	79-01-6	201-167-4	N.D.	0.05	Carcinogen
Sodium chromate*	7775-11-3	231-889-5	N.D.	0.005	Carcinogen Mutagen Toxic for Reproduction
Ammonium dichromate*	7789-09-5	232-143-1	N.D.	0.005	Carcinogen Mutagen Toxic for Reproduction
Potassium dichromate*	7778-50-9	231-906-6	N.D.	0.005	Carcinogen Mutagen Toxic for Reproduction
Potassium chromate*	7789-00-6	232-140-5	N.D.	0.005	Carcinogen Mutagen

The document is issued by the Company subject to its General Conditions of Analysis which are available on request or accessible at <http://www.sgs.com/sgscs/sgscs.asp>. For electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/sgscs/sgscs.asp>. Results in terms of identification, quality, concentration and/or other issues (unless stated to the contrary) are not intended to be definitive and are based on the information provided by the client. The Company's liability is limited to the agreed scope of the analysis. The client is responsible for the accuracy of the information provided. The document is issued for the sole purpose of the analysis and is not intended to be used for any other purpose.



Test Report No. F690101/LF-CTSAYAU12-04761

Issued Date: August 30, 2012

Page 6 of 10

Substance Name	CAS number	EC number	Concentration (%)	Reporting Limit (%)	Classification
Cobalt(II) sulphate*	10124-43-3	233-334-2	N.D.	0.005	Carcinogen Toxic for Reproduction
Cobalt(II) dinitrate*	10141-05-6	233-402-1	N.D.	0.005	Carcinogen Toxic for Reproduction
Cobalt(II) carbonate*	513-79-1	208-169-4	N.D.	0.005	Carcinogen Toxic for Reproduction
Cobalt(II) diacetate*	71-48-7	200-755-8	N.D.	0.005	Carcinogen Toxic for Reproduction
2-Methoxyethanol	109-86-4	203-713-7	N.D.	0.05	Toxic for Reproduction
2-Ethoxyethanol	110-80-5	203-804-1	N.D.	0.05	Toxic for Reproduction
Chromium trioxide*	1333-82-0	215-607-8	N.D.	0.005	Carcinogen Mutagen
Acids generated from chromium trioxide and their oligomers: Chromic acid Dichromic acid Oligomers of chromic acid and dichromic acid	7738-94-5 13530-68-2 -	231-801-5 236-881-5 -	N.D.	0.005	Carcinogen
1-methyl-2-pyrrolidone	872-50-4	212-828-1	N.D.	0.05	Toxic for Reproduction
2-ethoxyethyl acetate	111-15-9	203-839-2	N.D.	0.05	Toxic for Reproduction
1,2-benzenedicarboxylic acid, di-C6-8-branched alkyl esters, C7-rich	71888-89-6	276-158-1	N.D.	0.05	Toxic for Reproduction
1,2-benzenedicarboxylic acid, di-C7-11-branched and linear alkyl esters	68515-42-4	271-084-6	N.D.	0.05	Toxic for Reproduction
1,2,3-trichloropropane	96-18-4	202-486-1	N.D.	0.05	Carcinogen Toxic for Reproduction
Hydrazine	7803-57-8 302-01-2	206-114-9	N.D.	0.05	Carcinogen
Strontium chromate*	7789-06-2	232-142-6	N.D.	0.005	Carcinogen

This document is issued by the Company subject to its General Conditions of Service printed in actual, available or issued in electronic form at www.sgs.com/sgs/sgs/sgs.pdf. In addition, General Conditions, subject to Terms and Conditions for Customers, Documents of www.sgs.com/sgs/sgs/sgs.pdf, Relative to them in the location of Safety, environment and protection issues (other than the) by force of this document is issued. The information contained herein reflects the Company's findings and is not intended to be used for any other purpose. The Company's liability is limited to the extent of the information provided. The Company is not responsible for any damage or loss arising from the use of this information. This document is issued for use internal or external to the Company. The information contained herein is not intended to be used for any other purpose. The Company is not responsible for any damage or loss arising from the use of this information. This document is issued for use internal or external to the Company.



Test Report No. F660101/LF-CTSAU12-04761

Issued Date: August 30, 2012

Page 7 of 10

Substance Name	CAS number	EC number	Concentration (%)	Reporting Limit (%)	Classification
1,2-Dichloroethane	107-06-2	203-458-1	N.D.	0.05	Carcinogenic
2,2'-dichloro-4,4'-methylenedianiline (MOCA)	101-14-4	202-918-9	N.D.	0.05	Carcinogenic
2-Methoxyaniline o-Anisidine	90-04-0	201-963-1	N.D.	0.05	Carcinogenic
4-(1,1,3,3-tetramethylbutyl)phenol, (4-tert-Octylphenol)	140-66-9	205-426-2	N.D.	0.05	Equivalent level of concern having probable serious effects to the environment
Aluminosilicate Refractory Ceramic Fibres* (RCF)	650-017-00-8 (Index no.)	-	N.D.	0.005	Carcinogenic
Arsenic acid*	7778-39-4	231-901-9	N.D.	0.005	Carcinogenic
Bis(2-methoxyethyl) ether	111-96-6	203-924-4	N.D.	0.05	Toxic for reproduction
Bis(2-methoxyethyl) phthalate	117-82-8	204-212-6	N.D.	0.05	Toxic for reproduction
Calcium arsenate*	7778-44-1	231-904-5	N.D.	0.005	Carcinogenic
Dichromium tris(chromate)*	24613-89-6	246-356-2	N.D.	0.005	Carcinogenic
Formaldehyde, oligomeric reaction products with aniline (technical MDA)	25214-70-4	500-036-1	N.D.	0.05	Carcinogenic
Lead diazide*	13424-46-9	236-542-1	N.D.	0.005	Toxic for reproduction
Lead dipicrate*	6477-64-1	229-335-2	N.D.	0.005	Toxic for reproduction
Lead styphnate*	15245-44-0	239-290-2	N.D.	0.005	Toxic for reproduction
N,N-dimethylacetamide (DMAC)	127-19-5	204-826-4	N.D.	0.05	Toxic for reproduction
Pentazinc chromate octahydroxide*	49663-84-5	256-418-0	N.D.	0.005	Carcinogenic
Phenolphthalein	77-09-8	201-004-7	N.D.	0.05	Carcinogenic
Potassium hydroxyoctaoxodizincatedichromate*	11103-86-9	234-329-8	N.D.	0.005	Carcinogenic
Trilead diarsenate*	3687-31-8	222-979-5	N.D.	0.005	Carcinogenic Toxic for reproduction
Zirconia Aluminosilicate Refractory Ceramic Fibres (Zr-RCF)*	650-017-00-8 (Index no.)	-	N.D.	0.005	Carcinogenic

This document is issued by the Company subject to the General Conditions of Service printed in actual, available or issued or available at <http://www.sgs.com/ServiceConditions> and, for detailed General Conditions, subject to Terms and Conditions for Customs Documents at <http://www.sgs.com/CustomsDocuments>. The Client hereby acknowledges and certifies that the results shown in this report are based on the samples provided and that the results are not intended to be used for any other purpose. The Client is responsible for the accuracy of the data provided and for the results shown in this report. The Client is responsible for the accuracy of the data provided and for the results shown in this report. The Client is responsible for the accuracy of the data provided and for the results shown in this report.



Test Report No. F690101/LF-CTSAYAU12-04761 Issued Date: August 30, 2012 Page 8 of 10

Substance Name	CAS number	EC number	Concentration (%)	Reporting Limit (%)	Classification
1,2-bis(2-methoxyethoxy)ethane (TEGDME; triglyme)	112-49-2	203-977-3	N.D.	0.05	Toxic for reproduction
1,2-dimethoxyethane;ethylene glycol dimethyl ether (EGDME)	110-71-4	203-794-9	N.D.	0.05	Toxic for reproduction
Diboron trioxide*	1303-86-2	215-125-8	NA.	0.005	Toxic for reproduction
Formamide	75-12-7	200-842-0	N.D.	0.05	Toxic for reproduction
Lead(II) bis(methanesulfonate)*	17570-76-2	401-750-5	N.D.	0.005	Toxic for reproduction
TGIC(1,3,5-tris(oxiranylmethyl)-1,3,5-triazine-2,4,6-(1H,3H,5H)-trione)	2451-62-9	219-514-3	N.D.	0.05	Mutagenic
β -TGIC (1,3,5-tris[(2S and 2R)-2,3-epoxypropyl]-1,3,5-triazine-2,4,6-(1H,3H,5H)-trione)**	59853-74-6	423-400-0	N.D.	0.05	Mutagenic
4,4'-bis(dimethylamino)benzophenone (Michler's ketone)	90-94-8	202-027-5	N.D.	0.05	Carcinogenic
N,N,N'-tetramethyl-4,4'-methylenedianiline (Michler's base)	101-81-1	202-959-2	N.D.	0.05	Carcinogenic
[4-[4,4'-bis(dimethylamino)benzhydylidene)cyclohexa-2,5-dien-1-ylidene]dimethylammonium chloride (C.I. Basic Violet 3)	548-62-9	208-953-8	N.D.	0.05	Carcinogenic
[4-[[4-anilino-1-naphthyl][4-(dimethylamino)phenyl]methylene]cyclohexa-2,5-dien-1-ylidene]dimethylammonium chloride (C.I. Basic Blue 26)	2580-56-5	219-943-8	N.D.	0.05	Carcinogenic
O,O-Bis[4-(dimethylamino)phenyl]-4(phenylamino)naphthalene-1-methanol (C.I. Solvent Blue 4)	6786-83-0	229-851-8	N.D.	0.05	Carcinogenic
4,4'-bis(dimethylamino)-4'-(methylamino)trityl alcohol	581-41-1	209-218-2	N.D.	0.05	Carcinogenic

This document is issued by the Company subject to its General Conditions of Sale which are available on request at www.sgs.com and www.sgs.com/sgs. For further general information, subject to Terms and Conditions for Sale, please contact our Client Services at clientservices@sgs.com. Results shown in this document are preliminary and constitute a service provided to you by SGS. The document is subject to the information contained herein unless the Company is notified in the form of a communication signed by the Client or its representative. The Company's liability is limited to the information provided in this document. The document is not intended to constitute an offer of insurance or any other financial product. The document is not intended to constitute an offer of insurance or any other financial product. The document is not intended to constitute an offer of insurance or any other financial product.

F055 Version 5

SGS Korea Co., Ltd.

304, G3M2, 125-1, Nongseong, Jachon-myeon, Gyeongsang, Gyeongsang, Korea 521-947
 t +82 (0)55 3149 8500 f +82 (0)55 3 098 9766 <http://www.sgs.com> clientservices@sgs.com


Member of the SGS Group (SocMA Geneva SA, Switzerland)



Test Report No. F690101/LF-CTSAYAU12-04761 Issued Date: August 30, 2012 Page 9 of 10

Note:

1. RL – Reporting Limit
2. N.D. – Not detected (lower than RL)
 N.A. – Not applicable for respective material type.
 The submitted sample was found to contain significant amount of specific element(s) of SVHC. Upon further test verification and also information provided from client, the possibility that the element(s) content originate from SVHC is very unlikely, even though their presence cannot be exclude entirely. It may be assumed that the detected element(s) have a non-SVHC source.
3. Definition of classification is listed in Appendix A of this report in accordance with 67/548/EEC and Regulation (EC) No 1907/2006. For detail information, Detail explanation is available at the following link:
<http://echa.europa.eu/web/quest/candidate-list-table> (Candidate list)
4. * The test result is based on the calculation of selected element(s) / marker(s) and to the worst-case scenario. For detail information, please refer to the SGS REACH website: www.reach.sgs.com/substance-of-very-high-concern-analysis-information-page.htm
 The client is advised to review the chemical formulation to ascertain above metal substances present in the article.
 RL = 0.005% is evaluated for element (i.e. cobalt, arsenic, lead, sodium, chromium, chromium(VI), silicon, aluminum, zirconium, boron, and potassium respectively), except molybdenum RL=0.0005%
 0.1% (w/w) = 1,000 ppm = 1,000 mg/kg
5. ** β-TGIC is one of the isomers for TGIC compounds and hence, tested together. The reported test result is based the proposed ratio as according to ECHA dossier.

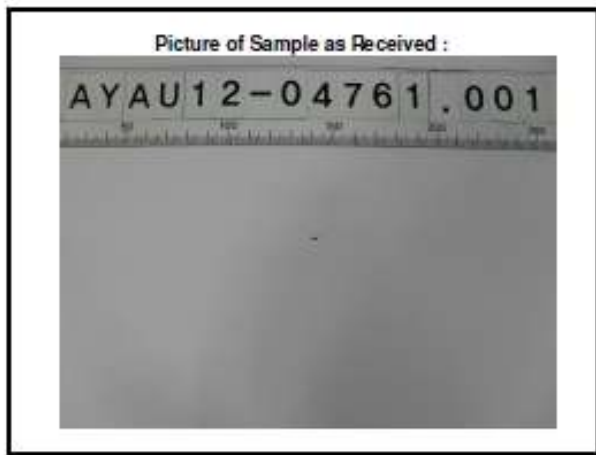

*** End of Report ***

This document is issued by the Company subject to its General Conditions of Service which are available on request at www.sgs.com and/or sgs@sgs.com. For electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com. Neither is there a guarantee of timely, uninterrupted and exclusive access to such data. Any failure of this document is without prejudice to the information contained herein unless the Company is notified in writing and within the time of its intervention and under the full control of the Company. Any intentional alteration, deletion or falsification of the content or appearance of this document is illegal and constitutes a violation of the applicable laws. The document cannot be reproduced except in full without prior written consent of the Company. The Company is not responsible for the content of any external website. The complete report document is available for 30 days only.



Test Report No. F690101/LF-CTSAYAU12-04761 Issued Date: August 30, 2012 Page 10 of 10

Appendix A

Classification	Definition under 67/548/EEC and Regulation (EC) No 1907/2006
Carcinogen Category 1:	<u>Substances known to be carcinogenic to man.</u> There is sufficient evidence to establish a causal association between human exposure to a substance and the development of cancer.
Carcinogen Category 2:	<u>Substances which should be regarded as if they are carcinogenic to man.</u> There is sufficient evidence to provide a strong presumption that human exposure to a substance may result in the development of cancer. Generally on the basis of: - appropriate long-term animal studies - other relevant information.
Mutagen Category 1:	<u>Substances known to be mutagenic to man.</u> There is sufficient evidence to establish a causal association between human exposure to a substance and heritable genetic damage.
Mutagen Category 2:	<u>Substances which should be regarded as if they are mutagenic to man.</u> There is sufficient evidence to provide a strong presumption that human exposure to the substance may result in the development of heritable genetic damage, generally on the basis of: - appropriate animal studies, - other relevant information.
Toxic to Reproduction Category 1:	<u>Substances known to impair fertility in humans.</u> There is sufficient evidence to establish a causal relationship between human exposure to the substance and impaired fertility. <u>Substances known to cause developmental toxicity in humans.</u> There is sufficient evidence to establish a causal relationship between human exposure to the substance and subsequent developmental toxic effects in the progeny.
Toxic to Reproduction Category 2:	<u>Substances which should be regarded as if they impair fertility in humans.</u> There is sufficient evidence to provide a strong presumption that human exposure to the substance may result in impaired fertility on the basis of: - clear evidence in animal studies of impaired fertility in the absence of toxic effects, or, evidence of impaired fertility occurring at around the same dose levels as other toxic effects but which is not a secondary nonspecific consequence of the other toxic effects, - other relevant information. <u>Substances which should be regarded as if they cause developmental toxicity to humans.</u> There is sufficient evidence to provide a strong presumption that human exposure to the substance may result in developmental toxicity, generally on the basis of: - clear results in appropriate animal studies where effects have been observed in the absence of signs of marked maternal toxicity, or at around the same dose levels as other toxic effects but which are not a secondary non-specific consequence of the other toxic effects, - other relevant information.
PBT & vPvB:	Substances which are persistent, bioaccumulative and toxic (PBT) or very persistent and very bioaccumulative (vPvB) pose a particular challenge to the chemicals safety management. For these substances a "safe" concentration in the environment cannot be established with sufficient reliability.

The document is issued by the Company subject to its General Conditions of Service which are available on request or accessible at <http://www.sgslab.com/ServiceConditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgslab.com/ServiceConditions.aspx>. Neither is there an implication of liability, endorsement and/or certification issued by SGS. If the document is subject to internal control, please inform the Company in writing at the time of its submission and under the terms of its General Conditions of Service. The Company's liability is limited to the extent of the information provided in this document. The document is issued for informational purposes only and does not constitute an offer of any financial product. The document is issued for informational purposes only and does not constitute an offer of any financial product.